PRODUCT DATASHEET
LED R50 60 36° DIM P 5.9W 927 E14

PARATHOM® DIM R50 | Dimmable LED reflector lamps R50 with retrofit screw base



Areas of application

- Shops and exhibition rooms
- Domestic applications
- Commercial applications
- Accent lighting
- Outdoor use in suitable outdoor luminaires only

Product benefits

- Quick, simple and safe replacement without rewiring
- Design, dimensions, luminous flux comparable to an incandescent or halogen lamp
- Low maintenance costs thanks to long lifetime
- No UV and near-IR radiation in the light beam
- Stepless dimming
- Very high dimmer compatibility, see also www.ledvance.com/dim
- Instant 100 % light, no warm-up time

Product features

- LED alternative to high voltage halogen lamps
- High color consistency: ≤ 5 SDCM
- Dimmable





© 2024, LEDVANCE GmbH. All rights reserved.

- Base: E14
- Lamp made of glass
- Very high color rendering (R_a: 90)
- Lifetime: up to 25,000 h

© 2024, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA


Electrical data

Nominal wattage	5.9 W
Construction wattage	5.90 W
Nominal voltage	220…240 V
Claimed equiv. conventional lamp power	60 W
Nominal current	32 mA
Type of current	AC
Inrush current	0.9 A
Operating frequency	50/60 Hz
Mains frequency	50/60 Hz
Max. lamp number on MCB B10 A	162
Max. lamp number on MCB B16 A	259
Power factor λ	0.70

Photometrical data

Luminous intensity	607 cd
Luminous flux	350 lm
Nominal useful luminous flux 90°	350 lm
Luminous efficacy	59 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	≥90
Light color	927
Standard deviation of color matching	≤5 sdcm
Rated peak intensity	607 cd
Rated LLMF at 6,000 h	0.80
Flickering metric (Pst LM)	0.2
Stroboscope effect metric (SVM)	0.4

© 2024, LEDVANCE GmbH. All rights reserved.




Everlight 67-23ST HKE 2700K

Light technical data

Beam angle	36 °
Warm-up time (60 %)	‹ 0.50 s
Starting time	< 0.5 s

Dimensions & Weight

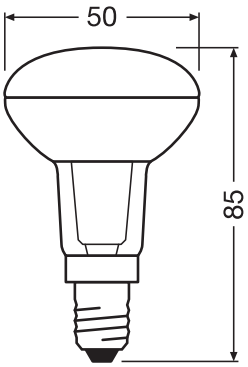

Overall length	85.00 mm
Diameter	50.00 mm
Maximum diameter	50 mm
Product weight	64.00 g

Temperatures & operating conditions

Ambient temperature range	-20…+40 °C
Maximum temperature at tc test point	96 °C

Lifespan

Lifespan L70/B50 at 25 °C	25000 h

© 2024, LEDVANCE GmbH. All rights reserved.

Number of switching cycles	100000
Lumen maintenance at end of service lifetime	0.70
Rated lamp survival factor at 6,000 h	≥ 0.90

Additional product data

Base (standard designation)	E14
Mercury content	0.0 mg
Mercury-free	Yes
Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

Capabilities

Dimmable	Yes

Certificates & Standards

Energy efficiency class	G [1)]
Energy consumption	6.00 kWh/1000h
Type of protection	IP20
Standards	CE / EAC
Photobiological safety group acc. to EN62778	RG1

1) Energy efficiency class (EEC) on a scale of A (highest efficiency) to G (lowest efficiency)

Country-specific categorizations

Order reference	LEDPR5060D 5,9W

Energy labelling regulation data acc EU 2019/2015

Lighting technology used	LED
Non-directional or directional	DLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	E14
Connected light source (CLS)	No
Color-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No

© 2024, LEDVANCE GmbH. All rights reserved.

Correlated colour temperature type	SINGLE_VALUE
Claim of equivalent power	Yes
Length	85.00 mm
Height	50.00 mm
Width	50.00 mm
Chromaticity coordinate x	0.458
Chromaticity coordinate y	0.400
R9 Colour rendering index	40
Beam angle correspondence	NARROW_CONE_90
Survival factor	0,9
Displacement factor	0.70
LED light source replaces a fluorescent light source	No
EPREL ID	522929
Model number	AC32660

DOWNLOAD DATA

	Documents and certificates	Document name
PDF	Declarations of conformity	R39 R50 R63 R80 LED lamp

	Photometric and lighting design files	Document name
	Spectral power distribution	Everlight 67-23ST HKE 2700K

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075607811	Folding box 1	51 mm x 51 mm x 88 mm	76.00 g	0.23 dm^3
4058075607828	Shipping box 10	287 mm x 119 mm x 106 mm	876.00 g	3.62 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

- For dimming conformity see www.ledvance.com/dim
- For further products and actual information concerning LED lamps see www.ledvance.com/ledlamps

© 2024, LEDVANCE GmbH. All rights reserved.

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2024, LEDVANCE GmbH. All rights reserved.