

Low Profile 6W outdoor, 2700K

Technical data

Voltage	220-240 VAC 50 Hz
System effect	6W
Light source	Replaceable Nordtronic LED light source
Colour temperature	2700 Kelvin
Light intensity	430 Lumen
Colour rendering	CRI>82
Expected lifespan	50.000 hours
Dimmable, how	Yes, trailing edge
SDCM	≤3
Beam angle	35°
Carving dimensions	Ø75 mm
Installation height	33 mm
Exterior dimensions	Ø87 mm
Dimensions driver	L: 93, W: 45 mm, H: 22 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1,5 - 30 pcs.
IP-class	IP44 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Plastic, acid resistant stainless steel AISI 316
Environment	Outdoors
Warranty	5 years
Approvals	CE



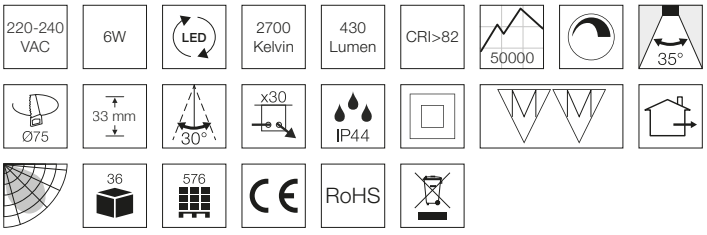

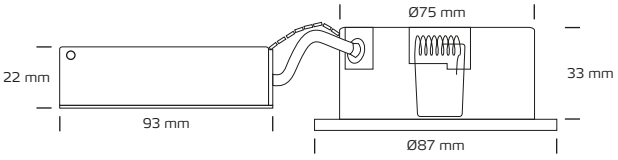

*The drawing is not drawn to scale

Product information

- Approved for installation directly in insulation and flammable materials
- Low mounting depth
- Quick and easy mounting
- Mounting with springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Designed and developed in Denmark

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
3671	5704629036710	White	Round
3672	5704629036727	Brushed steel	Round
3679	5704629036796	Black	Round

Accessories

Item no.	EAN no.	Type
1890	5704629018907	2700K 430lm
1891	5704629018914	3000K 460lm
1892	5704629018921	4000K 494lm

All rights reserved by Nordtronic A/S I Flade Engvej 4 I DK-9900 Frederikshavn I Denmark I +45 70 20 95 31